Warm Tiles®

Floor Warming Cable System

Anti-Fracture

ANTI-FRACTURE SYSTEM

SCRATCH COAT:
EASYHEAT® Warm Tiles® Floor Warming Cable imbedded in thin-set mortar or self-leveling underlayment

THIN-SET:
Thin-set mortar

CABLE:
EASYHEAT Warm Tiles Floor Warming Cable attached to substrate with strapping at standard 3"(7.62 cm) or alternating 3" (7.62 cm), 1.5 (3.80 cm) then 3" (7.62 cm) intervals

FINISH:
Final floor finish

STRAPPING:
Cable strapping stapled or glued to substrate

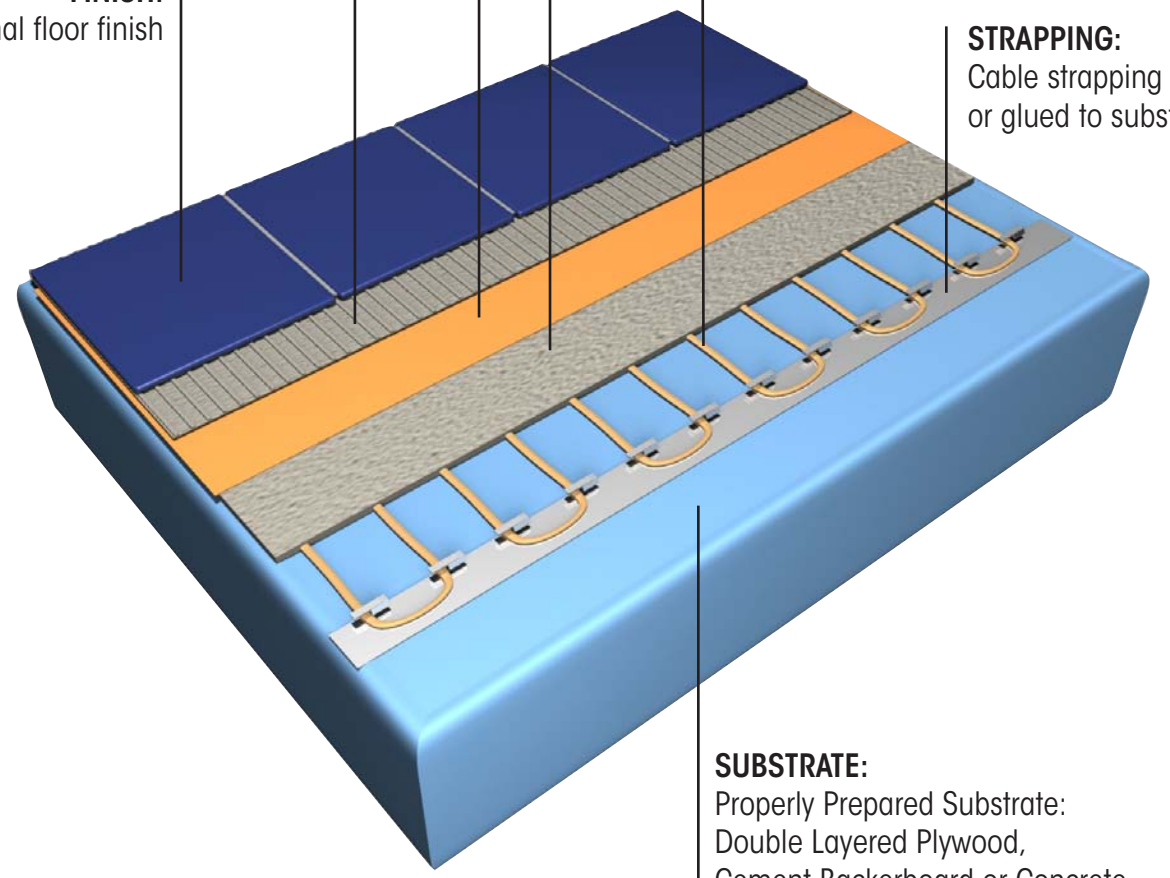

SUBSTRATE:
Properly Prepared Substrate:
Double Layered Plywood,
Cement Backerboard or Concrete

EASYHEAT®
Warming Your World

www.warmtiles.com

©2007 EASYHEAT ® EASYHEAT, Warm Tiles, Sno*Melter, Freeze Free, SR Trace, Deep Heat are Registered Trademarks of EASYHEAT Inc.
45100-006 REV.1